


Flange libere con anello d'appoggio da saldare a sovrapposizione PN. 10

Tipo 02 - Tipo 32

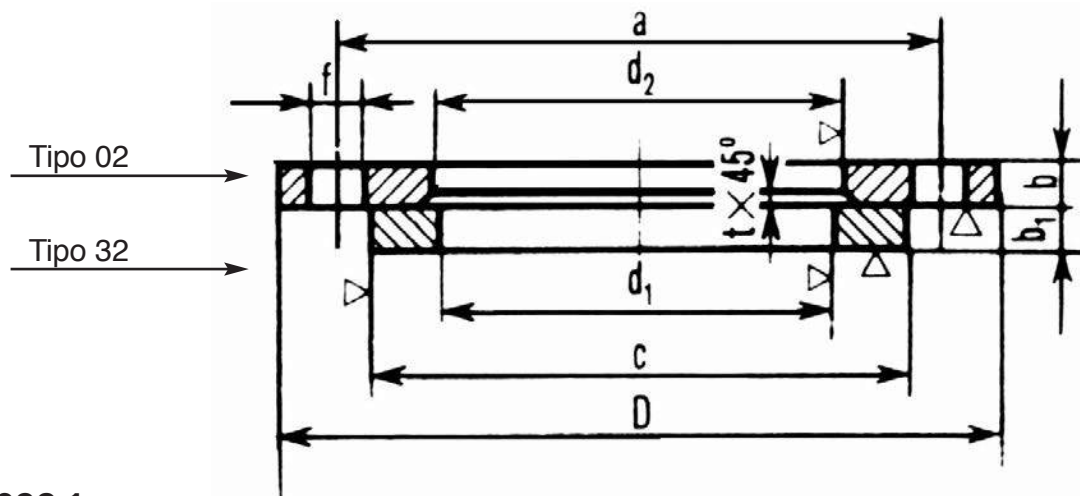

EN 1092-1

DN	Ø TUBO	FLANGIA LIBERA							VITI	ANELLO			Kg.	
		D	b	d ₂	t	a	f	FORI		b ₁	c	d ₁	FLANGE	ANELLO
10	17,2	90	14	21	3	60	14	4	M12	12	40	18,0	0,5	0,5
15	21,3	95	14	25	3	65	14	4	M12	12	45	22,0	0,5	0,5
20	26,9	105	16	31	4	75	14	4	M12	14	58	27,5	1,0	0,5
25	33,7	115	16	38	4	85	14	4	M12	14	68	34,5	1,0	0,5
32	42,4	140	18	47	5	100	18	4	M16	14	78	43,5	2,0	0,5
40	48,3	150	18	53	5	110	18	4	M16	14	88	49,5	2,0	0,5
50	60,3	165	20	65	5	125	18	4	M16	16	102	61,5	2,5	1,0
65	76,1	185	20	81	6	145	18	8	M16	16	122	77,5	3,0	1,0
80	88,9	200	20	94	6	160	18	8	M16	16	138	90,5	3,5	1,0
100	114,3	220	22	120	6	180	18	8	M16	18	158	116,0	4,5	1,5
125	139,7	250	22	145	6	210	18	8	M16	18	188	141,5	5,5	1,5
150	168,3	285	24	174	6	240	22	8	M20	20	212	170,5	7,0	2,0
200	219,1	340	24	226	6	295	22	8	M20	20	268	221,5	9,0	3,0
250	273,0	395	26	281	8	350	22	12	M20	22	320	276,5	11,5	3,5
300	323,9	445	26	333	8	400	22	12	M20	22	370	327,5	13,0	4,0
350	355,6	505	30	365	8	460	22	16	M20	22	430	359,5	19,5	7,5
400	406,4	565	32	416	8	515	26	16	M24	24	482	411,0	26,5	9,0
450	457,0	615	36	467	8	565	26	20	M24	24	532	462,0	32,5	10,5
500	508,0	670	38	519	8	620	26	20	M24	26	585	513,5	39,0	12,5
600	610,0	780	42	622	8	725	30	20	M27	26	685	616,5	52,5	14,5
700	711,0	895	50	721	8	840	30	24	M27	*	800	*	*	*
800	813,0	1015	56	824	8	950	33	24	M30	*	905	*	*	*

* Da specificare dal committente.