





ART. 601 FILTRO A Y FILETTATO

CERTIFICATI EN 10204/2.1

CARATTERISTICHE TECNICHE

1. Filtro a Y filettato
2. Estremità filettate secondo norme EN 10226-1 (EX ISO 7-1 e DIN 2999)
3. Acciaio inossidabile CF8M
4. Pressione massima 40 bar
5. Temperatura d'esercizio -30 °C + 240 °C

ART. 601 THREADED ENDS "Y" STRAINER

CERTIFICATES EN 10204/2.1

TECHNICAL INFORMATION


1. "Y" Strainer
2. Threaded ends according EN 10226-1 (EX ISO 7-1 e DIN 2999)
3. Made of stainless steel CF8M
4. Max. working pressure 40 bar
5. Working temperature -30 °C + 240 °C

DIMENSIONI GENERALI / GENERAL DIMENSIONS

Diametri Size	Codice Code	PN	Dimensioni / Dimensions (mm)				Peso/Weight (Kg)
			A	L	Ø d	e	
1/4"	IV601 1/4	40	30	65	1	1	0.29
3/8"	IV601 3/8	40	30	65	1	1	0.21
1/2"	IV601 1/2	40	40	65	1	1	0.22
3/4"	IV601 3/4	40	45	80	1	1	0.35
1"	IV6011	40	55	90	1	1	0.66
1 1/4"	IV6011 1/4	40	65	105	1	1	0.77
1 1/2"	IV6011 1/2	40	70	120	1	1	1.15
2"	IV6012	40	85	140	1	1	1.76

N°	NOME NAME	MATERIALI MATERIAL	FINITURA SUPERFICIALE SURFACE TREATMENT
1	Corpo / Body	CF8M	Sabbiata / Shot blasting + Pickling
2	Filtro / Strainer	AISI 316	---
3	Guarnizione / Gasket	PTFE	---
4	Tappo / Plug	CF8M	Sabbiata / Shot blasting + Pickling

DIAGRAMMA PERDITE DI CARICO HEAD LOSSE DIAGRAM

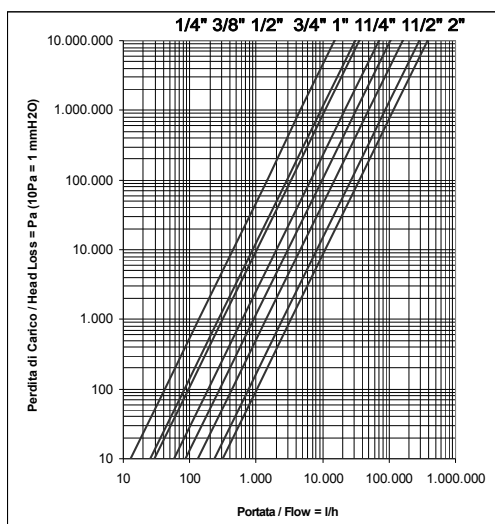

DETTAGLIO MAGLIA FILTRANTE MESH DETAIL

